







VIEWING DIRECTION

## SPECIFICATIONS

FRONT POLARIZER : TRANSMISSIVE,ADHESIVE (68.90mm X 29.50mm)  
 BACK POLARIZER : TRANSFLECTIVE,ADHESIVE (68.90mm X 29.50mm)  
 STORAGE TEMP :  $-30^\circ\text{C}$  TO  $+80^\circ\text{C}$   
 OPERATING TEMP :  $-20^\circ\text{C}$  TO  $+80^\circ\text{C}$   
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : STATIC, 5.0 V  
 DISPLAY MODE : TN, POSITIVE MODE  
 CUSTOMER P/N : 4-DIGIT LCD PANEL

SCALE: N.T.S.		 <b>Intelligent Display Solutions</b> <a href="http://www.i-lcd.com">www.i-lcd.com</a> <a href="mailto:info@i-lcd.com">info@i-lcd.com</a>
SHEET: 1 OF 2		
GENERAL TOL. 0.20 MM	UNITS MM	
APPROVALS	DATE	PART NUMBER :
APP		TLDP-4001-01
CHK		
DWN		

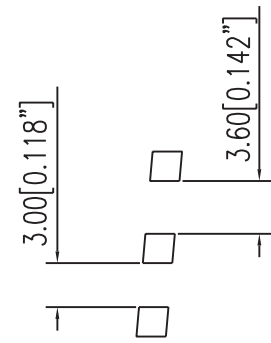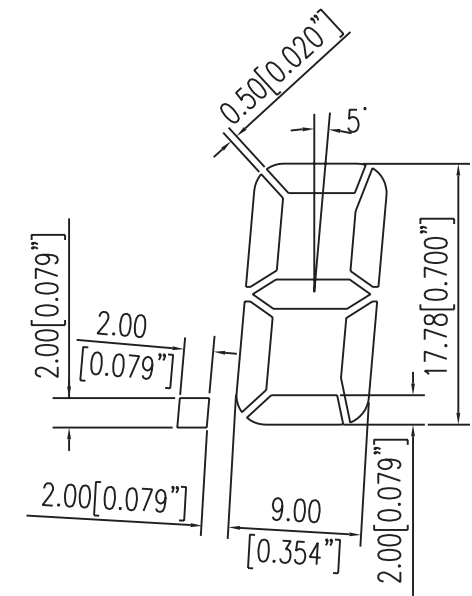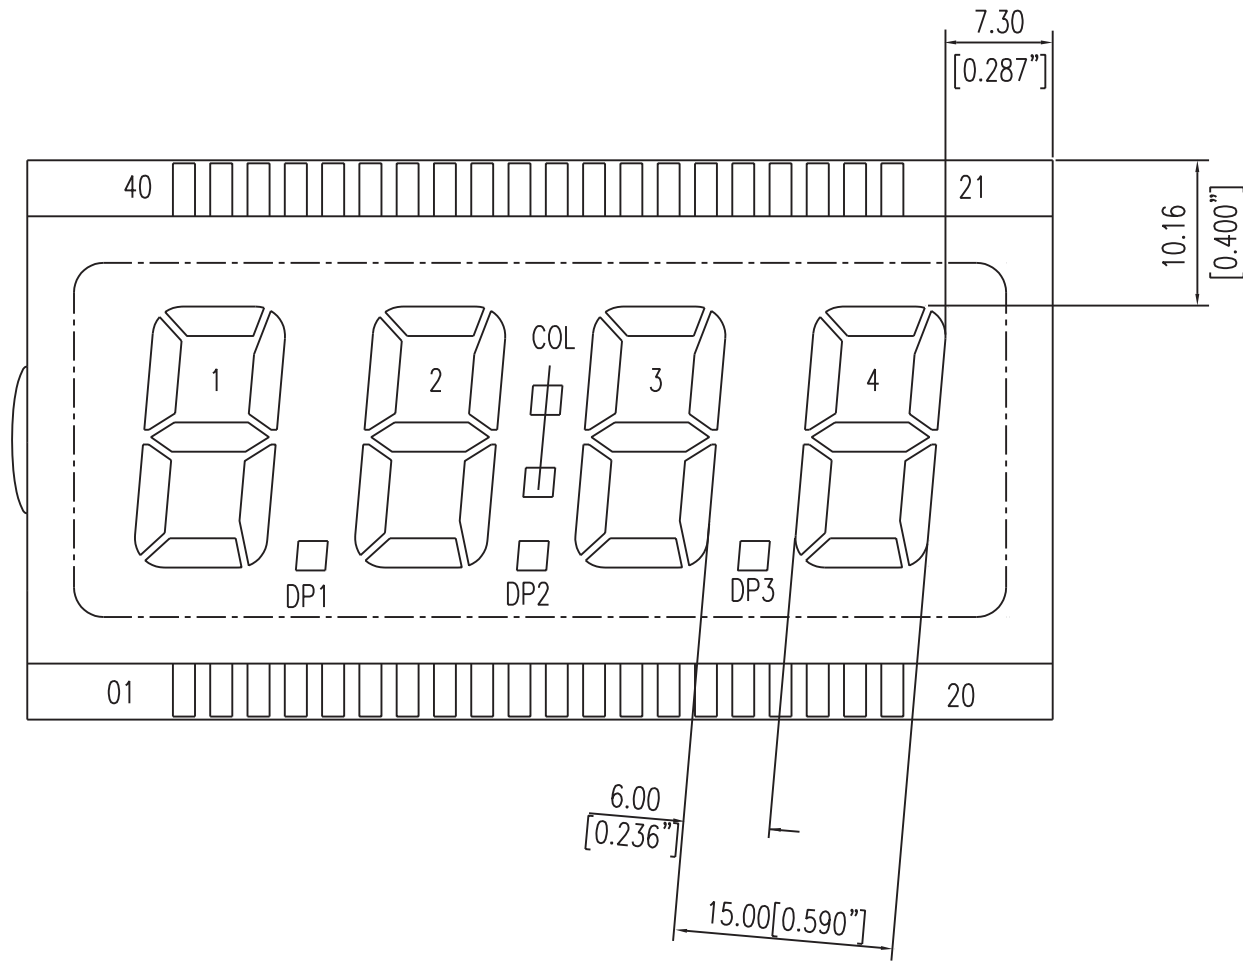

SEG	4A	4F	4G	3B	3A	3F	3G	COL	2B	2A	2F	2G	NC	1B	1A	1F	1G	NC	NC	NC
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
SEG	BP	NC	NC	NC	1E	1D	1C	DP1	2E	2D	2C	DP2	3E	3D	3C	DP3	4E	4D	4C	4B
PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20

SCALE: N.T.S.	
SHEET: 2 OF 2	
GENERAL TOL. 0.20 MM	UNITS MM
APPROVALS	DATE
APP	
CHK	
DWN	




**Intelligent Display Solutions**

[www.i-lcd.com](http://www.i-lcd.com)

[info@i-lcd.com](mailto:info@i-lcd.com)

PART NUMBER :  
TLDP-4001-01



DO NOT SCALE THIS DRAWING.

PROJECTION