

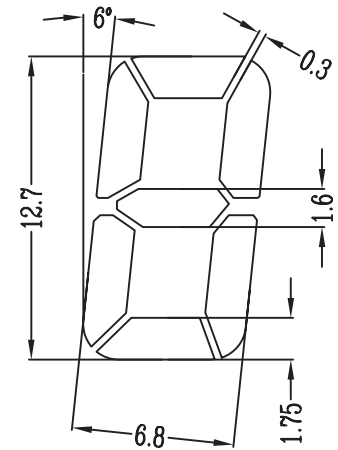
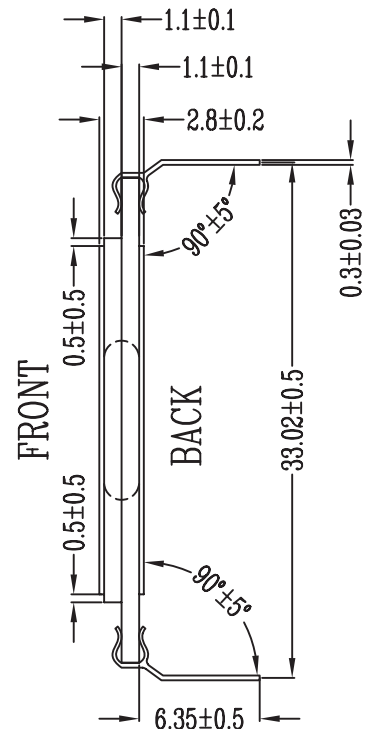


↑ 6 O'CLOCK VIEWING DIRECTION

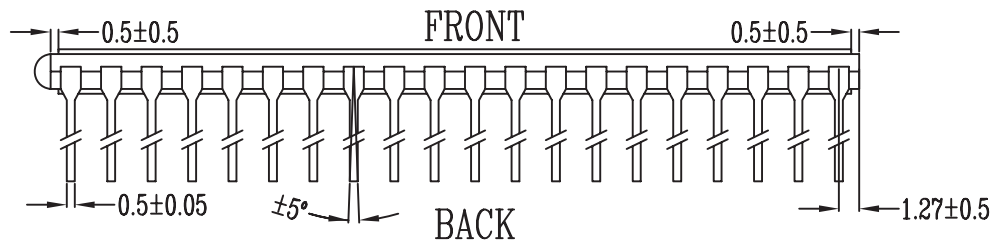

SCALE 1:1

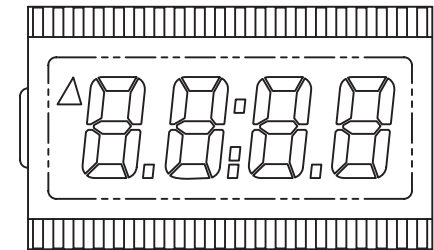


NOTE:


- 1 DISPLAY TYPE : TN
- 2 VIEWING DIRECTION : 6 O'CLOCK
- 3 POLARIZER MODE : REFLECTIVE/POSITIVE
- 4 DRIVE METHOD : STATIC
- 5 OPERATING VOLTAGE : 3.0V(FOR REFERENCE VOLTAGE)
- 6 OPERATING TEMP : 0°C--+50°C
- 7 STORAGE TEMP : -10°C--+60°C
- 8 CONNECTION : PIN
- 9 FRAME FREQUENCY : 64Hz

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	NC	NC	NC	4E	4D	4C	DP4	3E	3D	3C	DP3	2E	2D	2C	DP2	1E	1D	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	1A	1F	1G	2B	2A	2F	2G	COL	3B	3A	3F	3G	NC	4B	4A	4F	4G	S1	NC	COM


REVISION RECORD		NAME	DATE	IDS Intelligent Display Solutions					
1				www.i-lcd.com info@i-lcd.com					
2				VERSION	B	UNIT	MM	NO. 1/4	TLDP-4004-01
3				APPROVED		CHECKED		DRAWN	
4									

SEGMENT

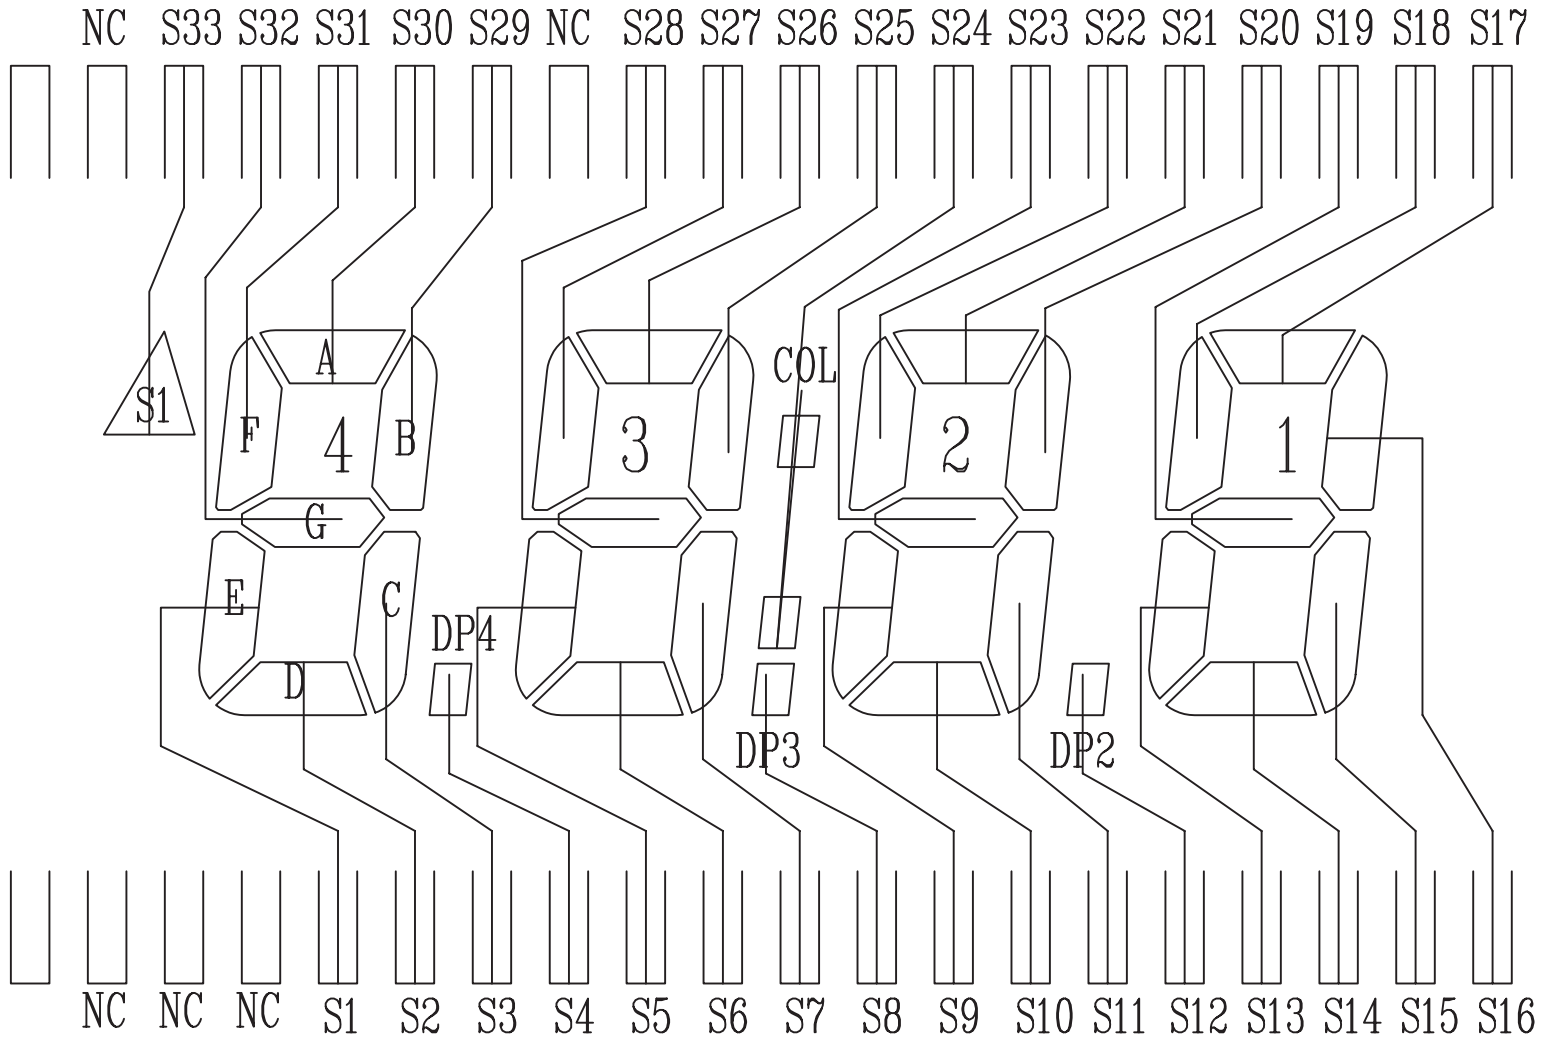


 Intelligent Display Solutions www.i-lcd.com info@i-lcd.com					
VERSION	B	UNIT	MM	NO. 2/4	TLDP-4004-01

COMMON

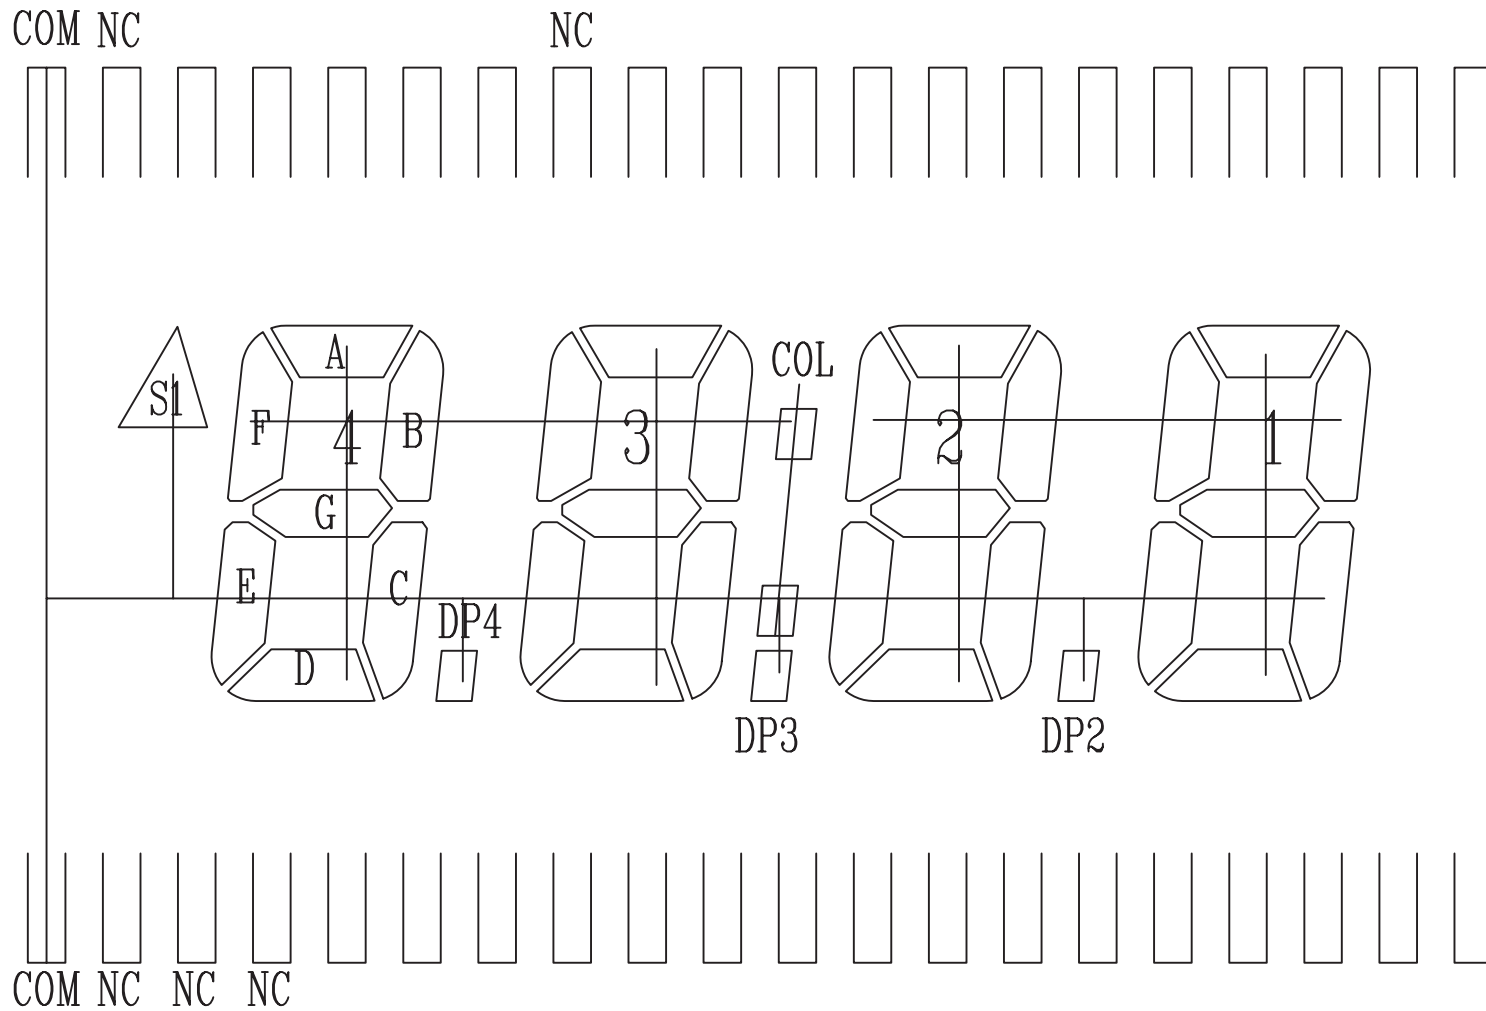

Intelligent Display Solutions
www.i-lcd.com info@i-lcd.com

VERSION	B	UNIT	MM	NO. 3/4	TLDP-4004-01
---------	---	------	----	---------	--------------

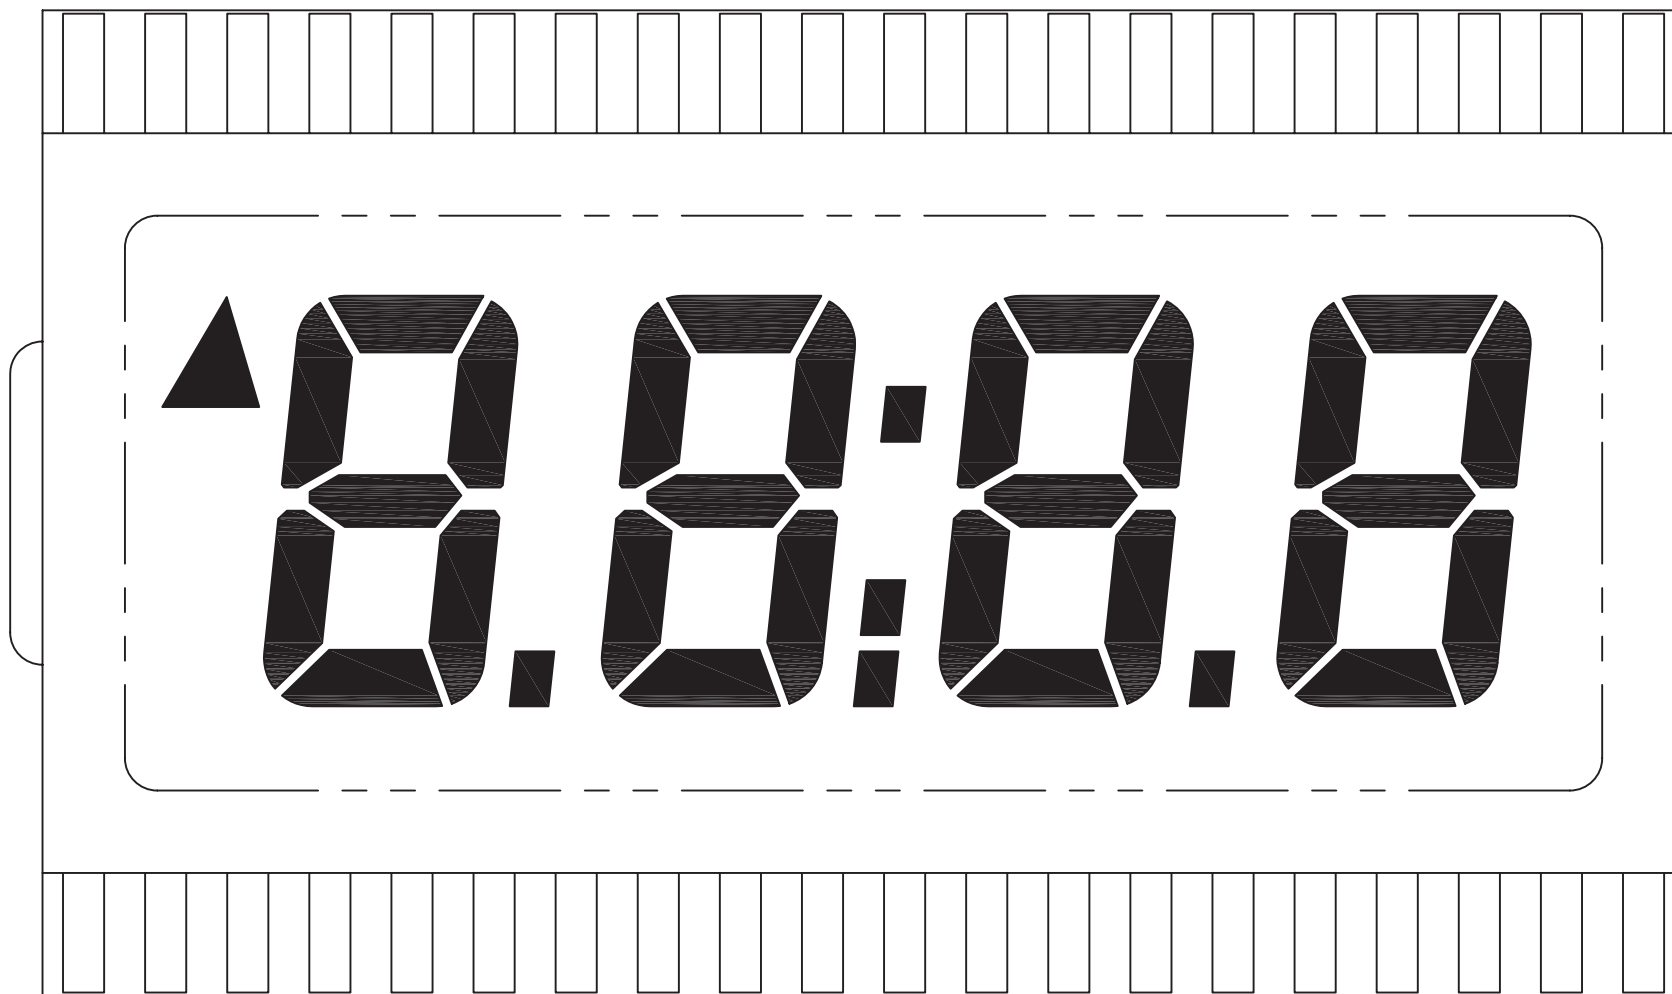

DISPLAY EFFECT



Intelligent Display Solutions
www.i-lcd.com
info@i-lcd.com

VERSION	B	UNIT	MM	NO. 4/4	TLDP-4004-01
---------	---	------	----	---------	--------------