





REV	Description	Date
A01	Amend Pin Table	2004-JUN-01

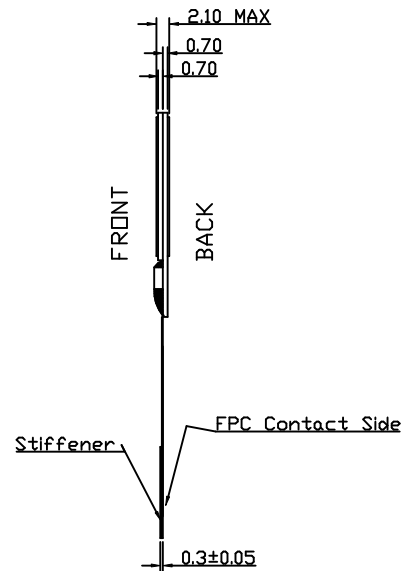



PIN TABLE

1	2	3	4	5	6	7	8	9	10
VSS	/CS1B	/RES	RS	SCLK	SID	VDD	VEE	C3N	C1P
11	12	13	14	15	16	17	18	19	20
C1P	C1N	C2N	C2P	VL2	VL3	VL4	VL5	VL6	INTRS

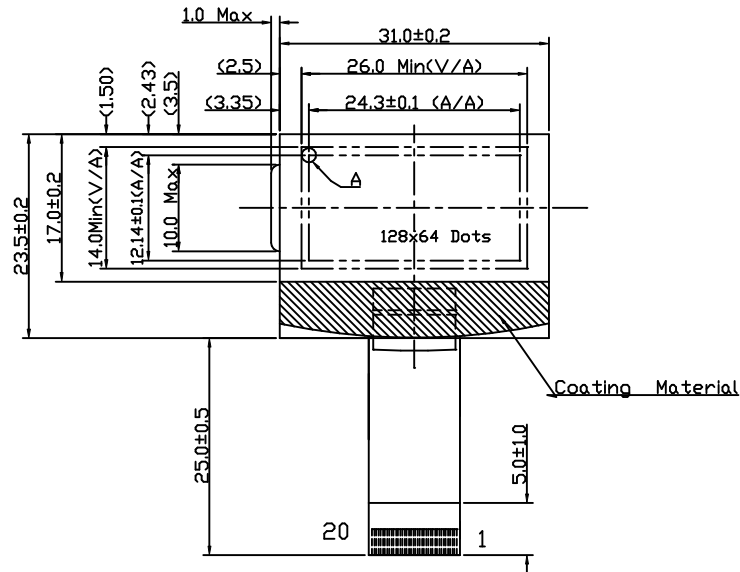

**Specifications:**

- 1) FSTN/+Ve/B&W/Transflective Mode
- 2) 1/65 Duty, 1/9 Bias, VLCD= 9.0V
- 3) Viewing Direction = 6 o'clock
- 4) Op. Temp.= -20°C To +70°C  
St. Temp.= -30°C To +80°C
- 5) IC=SSD1815

Description:		MECHANICAL SPECIFICATIONS		
Scale:		 <b>Intelligent Display Solutions</b> www.i-lcd.com info@i-lcd.com		
Sheet : 1 of 1				
Unspecified Tol. ±0.3	Unit mm	Project Number	Item Number	 <b>Projection</b>
Approvals	Date	TMGG12864I-01		
Draw:		Do Not Scale This Drawing		
Check:				
Approve:				